
KROMO YOUR SMART WASH	DUPLA-40 T				Approvato PRG	
					Emesso DOC	
Md.7.2.3.1	Rev. 00	Data. 01/01/2023			Famiglia	DW105N

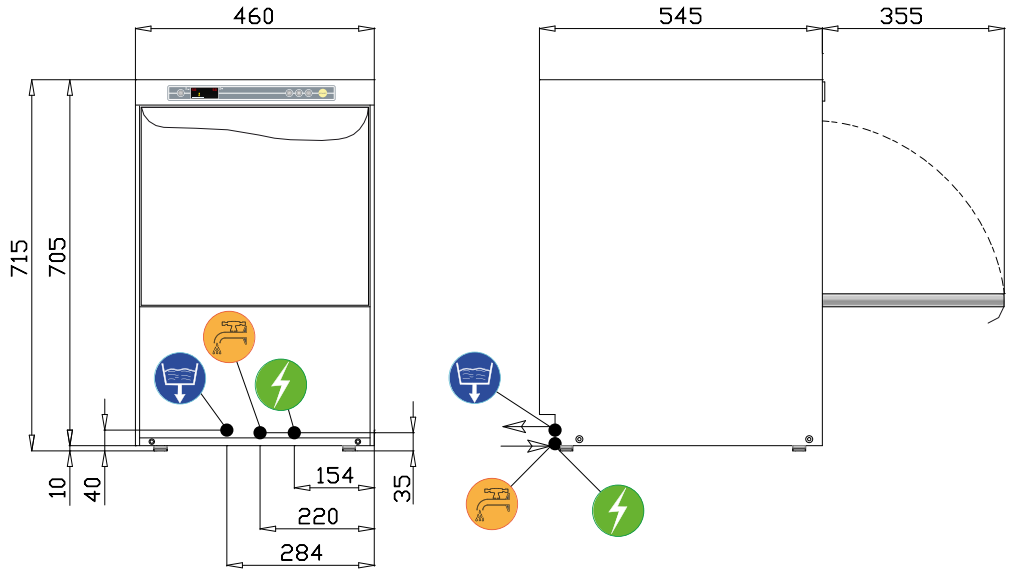

	ELECTRICAL SUPPLY
	WATER CONNECTION 3/4"GAS
	DRAINING PIPE Ø 24mm

TECHNICAL DATA	STANDARD			
EXTERNAL DIMENSIONS				
width	460 mm			
depth	545 mm			
height	715 mm			
WEIGHT	38 kg			
VOLTAGE	230V 50Hz			
POWER REQUIRED	3200 W			
WATER HARDNESS	2-8 °F			
INLET WATER PRESSURE	200-400 kPa			
CROCKERY DIMENSIONS				
plates diameter	295 mm			
glasses max. height	305 mm			
RACK DIMENSIONS	400X400 mm			
RACK EQUIPMENT	2XC121 - 1X10728 - 1X15060			
WASHING CYCLES (sec)	1(60)	2(90)	3(120)	4(180)
WATER SUPPLY 55°C				
racks/h(*)(1)	**60**	**40**	**30**	**20**
WATER SUPPLY 10°C				
racks/h(*)(1)	**16**	**16**	**16**	**16**
WATER CONSUMPTION / CYCLE (water pressure 200kPa)	1.8 L			
BOILER CAPACITY	3.4 L			
BOILER HEATING ELEMENT	2800 W			
RINSING TEMPERATURE (SET)	85°C			
TANK CAPACITY	15.5 L			
TANK HEATING ELEMENT	1250 W			
TANK TEMPERATURE (SET)	55°C			
PUMP POWER	400 W (185 L/min)			
DRAIN PUMP (optional)	25 W h MAX scarico 0.8m (40 L/min***)			
NOISE	61.2 (dB(A)±0.7)			

(*) STANDARD TERMOSTOP

(***) MAXIMUM FLOW RATE

(1) In case of cold water supply and/or continuous washing, the rinse-water heating process might take more time than usual, until the proper rinse temperature is reached. For this reason, the wash-cycle total timing might result longer than set.

N.B. A TERMINE DI LEGGE CI RISERVIAMO LA PROPRIETA' DI QUESTO DISEGNO CON DIVIETO DI RIPRODURLO O DI RENDERLO NOTO A TERZI O A DITTE CONCORRENTI SENZA NOSTRO CONSENSO SCRITTO