
KROMO YOUR SMART WASH	DUPLA 40			Approvato PRG	
				Emesso DOC	
Md.7.2.3.1	Rev. 00	Data. 01/09/2022		Famiglia	DW105A

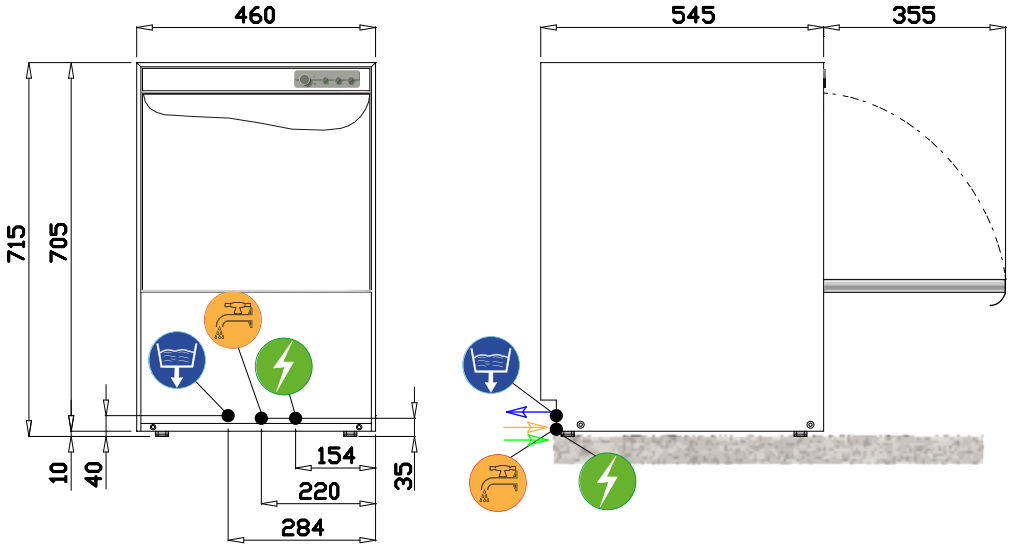

WATER CONNECTION 3/4"GAS | DRAINING PIPE Ø 24mm | ELECTRICAL SUPPLY

TECHNICAL DATA	STD	THREE-PHASE	UK
EXTERNAL DIMENSIONS			
width		460mm	
depth		545mm	
height		715mm	
WEIGHT		38 kg	
VOLTAGE	230V 50Hz	400V 3N 50Hz	240V 50Hz
POWER REQUIRED	3200 W	4400 W	3010 W
WATER HARDNESS		2-8 °F	
INLET WATER PRESSURE		200-400 kPa	
CROCKERY DIMENSIONS			
plates diameter		295mm	
dishes max. height		305mm	
RACK DIMENSIONS		400X400mm	
RACK EQUIPMENT		2XC121 - 1X10728 - 1X15060	
WASHING CYCLES (sec)		1(120)	
WATER SUPPLY 55°C			
racks/h(*)(1)		30	
WATER SUPPLY 10°C			
racks/h(*)(1)	16	22	14
WATER CONSUMPTION / CYCLE (water pressure 200kPa)		1.8 L	
BOILER CAPACITY		3.4 L	
BOILER HEATING ELEMENT	2800 W	4000 W	2610 W
RINSING TEMPERATURE (SET)		85°C	
TANK CAPACITY		15.5 L	
TANK HEATING ELEMENT		1250 W	
TANK TEMPERATURE (SET)		55°C	
PUMP POWER		400 W (185 L/min***)	
DRAIN PUMP (optional)		25 W h MAX drainig 0.8m (40 L/min***)	
ACOUSTIC PRESSURE		61.2 (dB(A)±0.7)	

(*) STANDARD TERMOSTOP

(***) MAXIMUM FLOW RATE

(1) In case of cold water supply and/or continuous washing, the rinse-water heating process might take more time than usual, until the proper rinse temperature is reached. For this reason, the wash-cycle total timing might result longer than set.

N.B. A TERMINE DI LEGGE CI RISERVIAMO LA PROPRIETA' DI QUESTO DISEGNO CON DIVIETO DI RIPRODURLO O DI RENDERLO NOTO A TERZI O A DITTE CONCORRENTI SENZA NOSTRO CONSENSO SCRITTO