KROMO YOUR SMART WASH	HOOD 140 PREMIUM HR		Approvato PRG	
			Emesso DOC	
Md.7.2.3.1	Rev. 0.0	Data. 01/01/2023	Famiglia	DW133

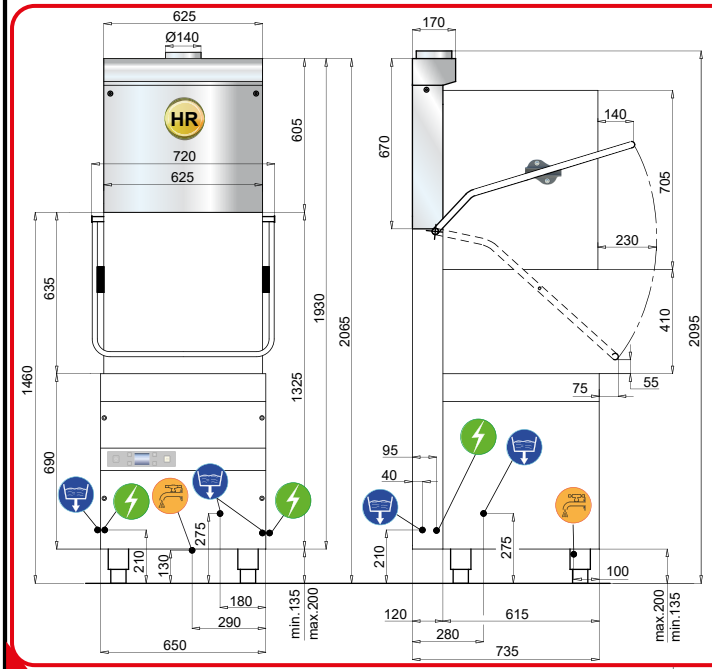

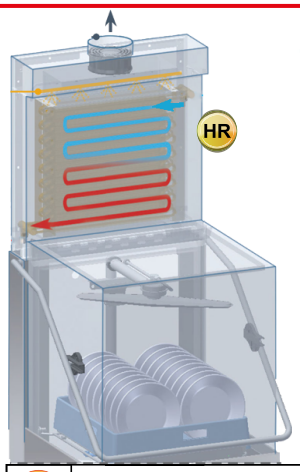

	WATER CONNECTION 3/4" GAS
	DRAIN PIPE Ø24mm
	ELECTRICAL SUPPLY

EXIT AIR TEMPERATURE : **25°C**

HUMIDITY: **60%**

AIR FLOW RATE: **105 m³/h**

HEAT RECOVERY PER HOUR: **6 kWh**
(VALUES CALCULATED ON THE BASIS OF THE SHORTEST CYCLE)

TECHNICAL DATA						
EXTERNAL DIMENSIONS						
width	720 mm					
depth	735 mm					
height	2095 mm					
WEIGHT(basic version)	145 kg					
VOLTAGE	400V 3N 50Hz					
POWER REQUIRED	9900 W					
WATER HARDNESS	< 8 °f					
WATER CONDUCTIVITY	> 200 µS/cm					
INLET WATER PRESSURE	200-400 kPa					
CROCKERY DIMENSIONS						
plates diameter	410 mm					
trays max. dimension	GASTRONORM 1/1 (530x325)					
RACK DIMENSION	500X500 mm					
RACK EQUIPMENT	2XC40 - 1XC44 - 2X15060					
WASHING CYCLES (sec)	0(21÷680) (**)	1 (50)	2 (90)	3 (120)	4 (180)	5 (300)
WATER SUPPLY 10°C						
racks/h(*)(¹)	/	40	40	30	20	12
WATER CONSUMPTION / CYCLE	3,5 l					
BOILER CAPACITY	15 l					
BOILER HEATING ELEMENT	9000 W					
RINSING TEMPERATURE (SET)	70°C-90°C(**)	82°C				
TANK CAPACITY	20 l					
TANK HEATING ELEMENT	2700 W					
TANK TEMPERATURE (SET)	50°C-70°C(**)	60°C				
PUMPS POWER washing/rinsing	900W (500 l/min***) /250 W					
DRAIN PUMP	25W (40 l/min***)					
NOISE	63,6±0,7 dB(A)					

(*) STANDARD TERMOSTOP / (***) MAXIMUM FLOW RATE / (**) CUSTOM CYCLE

(¹) In case of cold water supply and/or continuous washing, the rinse-water heating process might take more time than usual, until the proper rinse temperature is reached. For this reason, the wash-cycle total timing might result longer than set.

N.B. A TERMINE DI LEGGE CI RISERVIAMO LA PROPRIETA' DI QUESTO DISEGNO CON DIVIETO DI RIPRODURLO O DI RENDERLO NOTO A TERZI O A DITTE CONCORRENTI SENZA NOSTRO CONSENSO SCRITTO