


KROMO YOUR SMART WASH	HOOD 140 PREMIUM H+	Approvato PRG	
		Emesso DOC	
Md.7.2.3.1	Rev. 00	Data. 01/01/2023	Famiglia	DW133



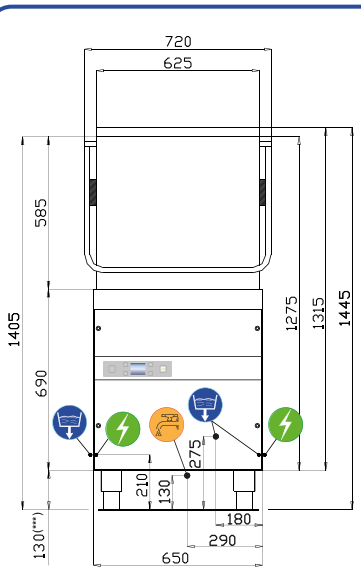

(***) MIN 130-MAX 200 mm

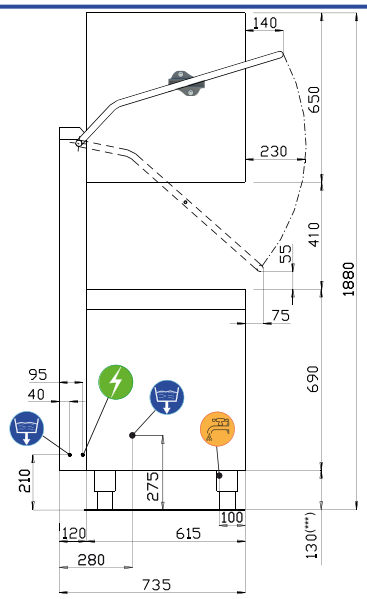

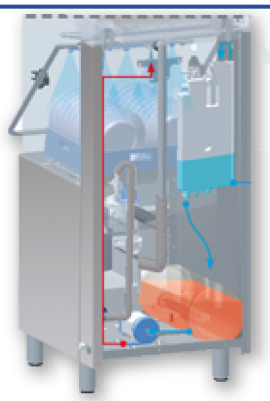

	WATER CONNECTION 3/4" GAS
	DRAIN PIPE Ø24mm
	ELECTRICAL SUPPLY

TECHNICAL DATA								
EXTERNAL DIMENSIONS								
width	720 mm							
depth	735 mm							
height	1445/1880 (open hood)							
WEIGHT(basic version)	125 kg							
VOLTAGE	400V 3N 50Hz							
POWER REQUIRED	9900 W							
WATER HARDNESS	2-8 °f							
INLET WATER PRESSURE	200-400 kPa							
CROCKERY DIMENSIONS								
plates diameter	410 mm							
trays max. dimension	GASTRONORM 1/1 (530x325)							
RACK DIMENSION	500X500 mm							
RACK EQUIPMENT	2XC40 - 1XC44 - 2X15060							
WASHING CYCLES (sec)	0(21÷680)(**)	H1 (180)	H2 (630)	1 (50)	2 (90)	3(120)	4(180)	5(300)
WATER SUPPLY 55°C								
racks/h(*)(1)	/	4	3	55	40	30	20	12
WATER SUPPLY 10°C								
racks/h(*)(1)	/	3	2	25	25	25	20	12
WATER CONSUMPTION / CYCLE	3,5 l							
BOILER CAPACITY	15 l							
BOILER HEATING ELEMENT	9000 W							
RINSING TEMPERATURE (SET)	70÷90°C(**)	90°C	87°C	82°C				
TANK CAPACITY	20 l							
TANK HEATING ELEMENT	2700 W							
TANK TEMPERATURE (SET)	50÷70°C(**)	75°C	70°C	60°C				
PUMPS POWER washing / rinsing	900W (500 l/min***)/250 W							
DRAIN PUMP	25 W (40 l/min***)							
NOISE	63.6±0.7 dB(A)							

(*) STANDARD TERMOSTOP / (***) MAXIMUM FLOW RATE / (**) CUSTOM CYCLE

(1) In case of cold water supply and/or continuous washing, the rinse-water heating process might take more time than usual, until the proper rinse temperature is reached. For this reason, the wash-cycle total timing might result longer than set.

N.B. A TERMINE DI LEGGE CI RISERVIAMO LA PROPRIETA' DI QUESTO DISEGNO CON DIVIETO DI RIPRODURLO O DI RENDERLO NOTO A TERZI O A DITTE CONCORRENTI SENZA NOSTRO CONSENSO SCRITTO