
KROMO YOUR SMART WASH	HOOD 800 T	Approvato PRG	
		Emesso DOC	
Md.7.2.3.1	Rev. 00	Data. 01/01/2023	Famiglia	DW014T

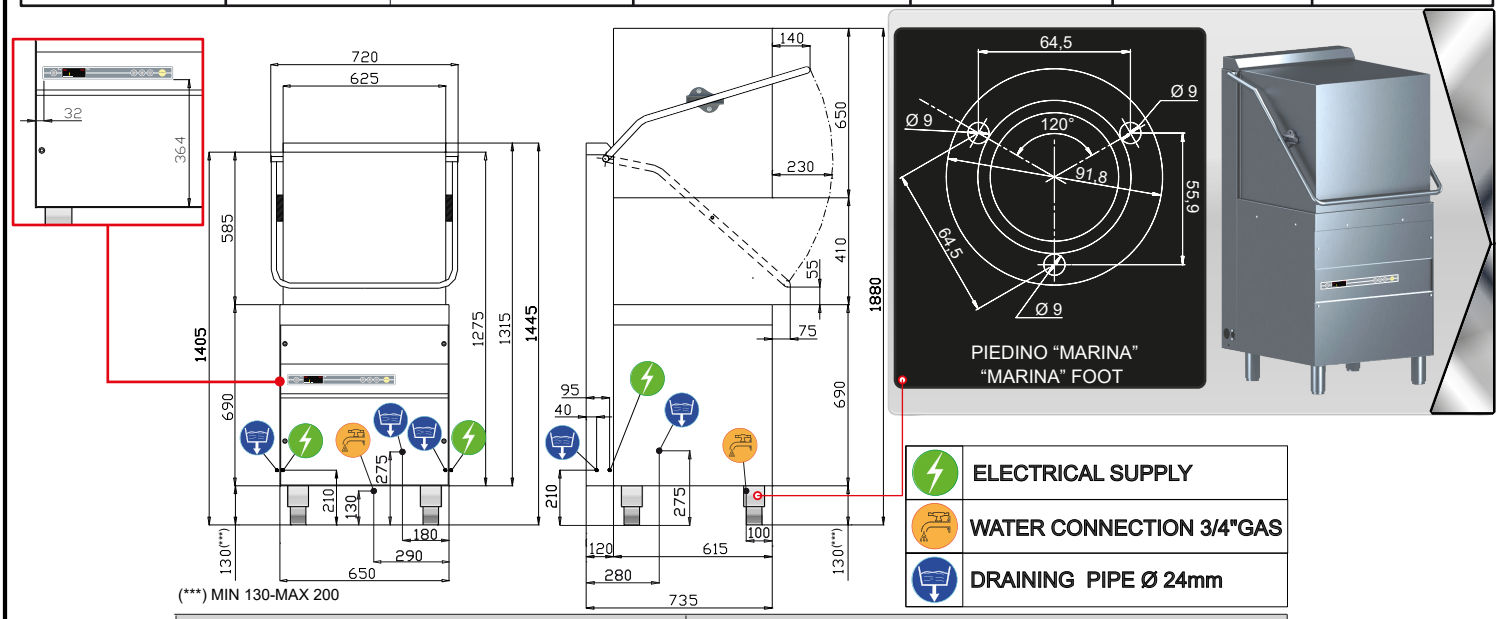

TECHNICAL DATA				
EXTERNAL DIMENSIONS				
width	720 mm			
depth	735 mm			
height	1445/1880(open hood) mm			
WEIGHT	100 kg			
VOLTAGE	400V 3N 50Hz			
POWER REQUIRED	6900 W			
WATER HARDNESS	2-8 °F			
INLET WATER PRESSURE	200-400 kPa			
CROCKERY DIMENSIONS				
plates diameter	410 mm			
trays max. dimension	GASTRONORM 1/1 (530x325)			
RACK DIMENSION	500X500 mm			
RACK EQUIPMENT	2XC40 - 1XC44 - 2X15060			
WASHING CYCLES (sec)	1(50)	2(80)	3(120)	4(180)
WATER SUPPLY 55°C				
racks/h(*)(1)	**72**	**45**	**30**	**20**
WATER SUPPLY 10°C				
racks/h(*)(1)	**22**	**22**	**22**	**20**
WATER CONSUMPTION / CYCLE (water pressure 200kPa)	2.8 l			
BOILER CAPACITY	10 l			
BOILER HEATING ELEMENT	6000 W			
RINSING TEMPERATURE (SET)	85°C			
TANK CAPACITY	30 l			
TANK HEATING ELEMENT	2700 W			
TANK TEMPERATURE (SET)	55°C			
PUMP POWER	900 W(500 L/min***)			
DRAIN PUMP (optional)	190 W(120 L/min***)			
NOISE	63,6±0.7 dB(A)			

(*) STANDARD TERMOSTOP

(***) MAXIMUM FLOW RATE

(1) In case of cold water supply and/or continuous washing, the rinse-water heating process might take more time than usual, until the proper rinse temperature is reached. For this reason, the wash-cycle total timing might result longer than set.

N.B. A TERMINE DI LEGGE CI RISERVIAMO LA PROPRIETA' DI QUESTO DISEGNO CON DIVIETO DI RIPRODURLO O DI RENDERLO NOTO A TERZI O A DITTE CONCORRENTI SENZA NOSTRO CONSENSO SCRITTO