

KROMO YOUR SMART WASH	HOOD 800			Approvato PRG	
				Emesso DOC	
Md.7.2.3.1	Rev. 00	Data. 01/09/2022		Famiglia	DW014A


	ELECTRICAL SUPPLY
	WATER CONNECTION 3/4"GAS
	DRAINING PIPE Ø 24mm



PIEDINO MARINA / MARINA FOOT



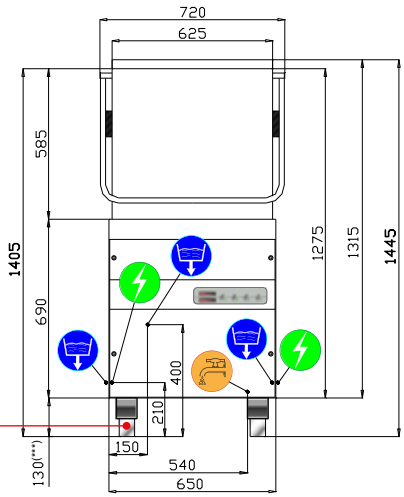

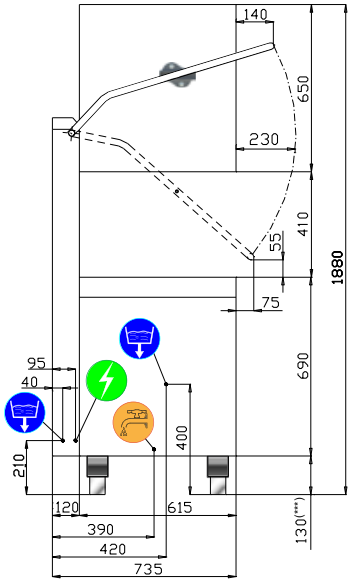

(***) MIN 130-MAX 200



TECHNICAL DATA		
EXTERNAL DIMENSIONS		
width	720 mm	
depth	735 mm	
height	1445/1880(open hood) mm	
WEIGHT	100 kg	
VOLTAGE	400V 3N 50Hz	
POWER REQUIRED	6900 W	
WATER HARDNESS	2-8 °F	
INLET WATER PRESSURE	200-400 kPa	
CROCKERY DIMENSIONS		
plates diameter	410 mm	
trays max. dimension	GASTRONORM 1/1 (530x325)	
RACK DIMENSION	500X500 mm	
RACK EQUIPMENT	2XC40 - 1XC44 - 2X15060	
WASHING CYCLES (sec)	1(50)	2(180)
WATER SUPPLY 55°C		
racks/h(*)(1)	46	20
WATER SUPPLY 10°C		
racks/h(*)(1)	20	20
WATER CONSUMPTION / CYCLE (water pressure 200kPa)	2.8 l	
BOILER CAPACITY	10 l	
BOILER HEATING ELEMENT	6000 W	
RINSING TEMPERATURE (SET)	85°C	
TANK CAPACITY	30 l	
TANK HEATING ELEMENT	2700 W	
TANK TEMPERATURE (SET)	55°C	
PUMP POWER	900 W(500 L/min***)	
DRAIN PUMP (optional)	190 W(120 L/min***)	
NOISE	63,6±0.7 dB(A)	

(*) STANDARD TERMOSTOP

(***) MAXIMUM FLOW RATE

(1) In case of cold water supply and/or continuous washing, the rinse-water heating process might take more time than usual, until the proper rinse temperature is reached. For this reason, the wash-cycle total timing might result longer than set.

N.B. A TERMINE DI LEGGE CI RISERVIAMO LA PROPRIETA' DI QUESTO DISEGNO CON DIVIETO DI RIPRODURLO O DI RENDERLO NOTO A TERZI O A DITTE CONCORRENTI SENZA NOSTRO CONSENSO SCRITTO